



SAVING YOUR
ELECTRICITY BILL

More Efficient

More Safe

More Convenient

More Intelligent

BALCONY ENERGY STORAGE SYSTEM

DEYE AUTUMN AE SERIES



Convenient Charge

Portable Power with
USB-A and Type C



High Protection

IP 65
Water & Dust Protection



Extreme Weather Adaptability

Wide Operating
Temperature $-10^{\circ}\text{C} \sim 50^{\circ}\text{C}$



Smart Connection

Bluetooth, Wi-Fi and
Mobile APP



Long Lifespan

10-year Warranty
6000 Cycles to 70% Capacity



Flexible Operation


Support On-grid and
Off-grid Operation

Integrated Solar Storage System All-In-One Module


2200W PV
MPPT Input


2kWh
LFP Battery


1000W On-grid and
Off-grid Operation

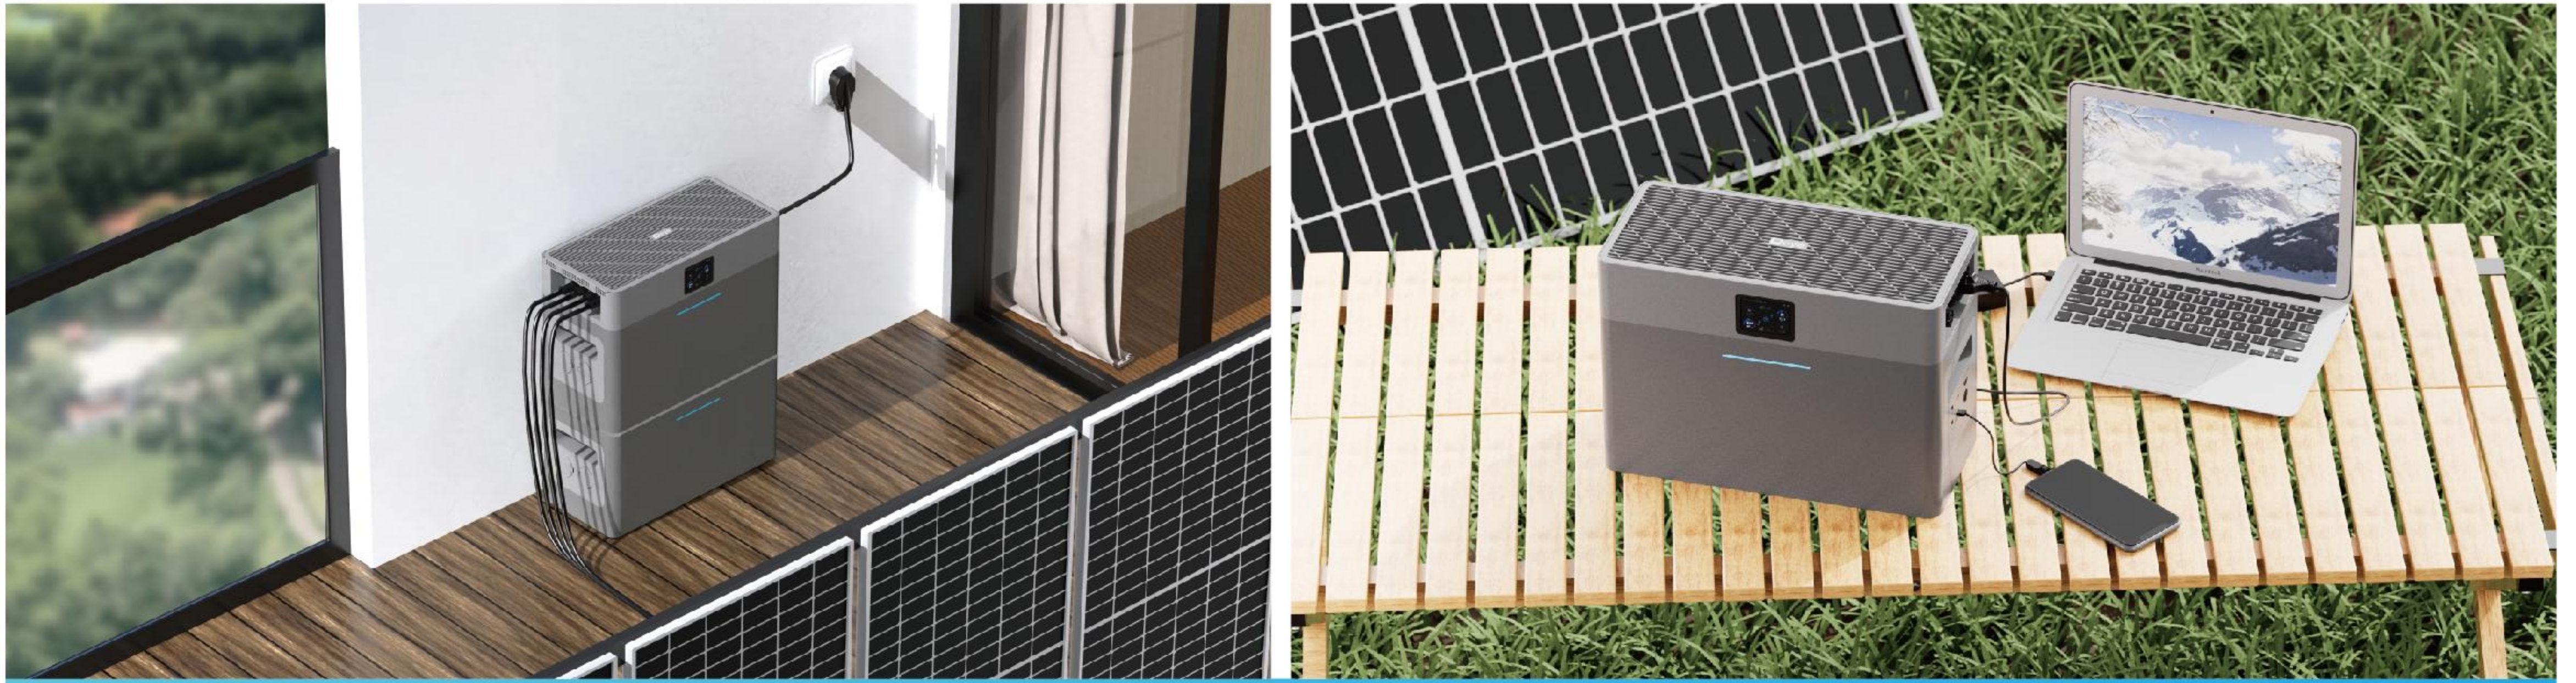

Model AE-FS2.0-2H2

AC Technical Specification

Nominal Input / Output Power / UPS Power	1000 / 1000W
AC Input / Output Frequency and Voltage	50Hz (45Hz ~ 55Hz) , 60Hz (55Hz ~ 65Hz) , L / N (PE) , 220 / 230 Vac
Grid Type	Single phase
Rated Grid Input / Output Current	4.6A / 4.4A
Max.Grid Input / Output Current	5.0A / 4.8A
Peak Power (off-grid)	2 time of rated power, 10s
Power Factor Adjustment Range	0.8 leading to 0.8 lagging
Max. bypass (Grid to load)	10A
DC injection current	THD<3% (Linear load<1.5%) mA

DC Technical Specification

Max. PV Input Power	2200W
Max. PV Input Current	18A+18A
Max. PV Short-circuit Current	27A+27A
Rated PV Input Voltage	42.5V (20V ~ 55V)
Start Up DC Voltage	25Vdc
MPPT Voltage Range	20 ~ 55V
Number of MPPT	2
Battery Chemistry	LiFePO ₄
Battery Nominal Voltage	51.2V
Battery Nominal Energy	2000Wh
Battery Operating Voltage	44.8V ~ 57.6V
Battery Cycle Life	≥6000 (@25°C±2°C, 0.5C / 0.5C, 70%EOL)

Other Technical Specification

Display	Colorful Touch LCD & APP & Battery LED (SOC, Alarm)
Communication interfaces	Wi-Fi, Bluetooth
Dimension (W × D × H)	450 × 210 × 321mm
Weight Approximate (kg)	26
Operating Temperature Range	-10°C ~ 50°C
Max. Operating Altitude	3000m
Relative Humidity	15% ~ 85% (No Condensing)
Safety EMC / Standard	IEC 62619, UN38.3, IEC / EN 62109-1, IEC / EN 62109-2, IEC / EN 61000-6-1, IEC / EN 61000-6-2, IEC / EN 61000-6-3, IEC / EN 61000-6-4
Grid Regulation	VDE 4105, IEC 61727 / 62116, VDE 0126, AS 4777.2, CEI 0-21, EN 50549-1, G98, G99, C10-11, UNE 217002, NBR 16149 / NBR 16150
Battery Certification	UN38.3, IEC 62619
Installation Style	Floor-Mounted
Warranty	10 years

*Supports up to 4 AE-F2.0 Smart Extra Batteries up to 10kWh.

AC Coupled Energy Storage System



99% Solar Panels &
Microinverters Compatible



2kWh
LFP Battery



1000W On-grid and
Off-grid Operation



Model	AE-F2.0-2H2
AC Technical Specification	
Nominal Input / Output Power / UPS Power	1000 / 1000W
AC Input / Output Frequency and Voltage	50Hz (45Hz ~ 55Hz) , 60Hz (55Hz ~ 65Hz) , L / N (PE) , 220 / 230 Vac
Grid Type	Single phase
Rated Grid input / output Current	4.6A / 4.4A
Max. Grid input / output Current	5.0A / 4.8A
Peak Power (off-grid)	2 time of rated power, 10s
Power Factor Adjustment Range	0.8 leading to 0.8 lagging
Max. bypass (Grid to load)	10A
DC injection current	THD<3% (Linear load<1.5%) mA
DC Technical Specification	
Battery Chemistry	LiFePO ₄
Battery Nominal Voltage	51.2V
Battery Nominal Energy	2000Wh
Battery Operating Voltage	44.8V ~ 57.6V
Battery Cycle Life	≥6000 (@25°C±2°C, 0.5C / 0.5C, 70%EOL)
Other Technical Specification	
Display	Colorful Touch LCD & APP & Battery LED (SOC, Alarm)
Communication interfaces	Wi-Fi, Bluetooth
Dimension (W × D × H)	450 × 210 × 321mm
Weight Approximate (kg)	26
Operating Temperature Range	-10°C ~ 50°C
Max. Operating Altitude	3000m
Relative Humidity	15% ~ 85% (No Condensing)
Safety EMC / Standard	IEC 62619, UN38.3, IEC / EN 62109-1, IEC / EN 62109-2, IEC / EN 61000-6-1, IEC / EN 61000-6-2, IEC / EN 61000-6-3, IEC / EN 61000-6-4
Grid Regulation	VDE 4105, IEC 61727 / 62116, VDE 0126, AS 4777.2, CEI 0-21, EN 50549-1, G98, G99, C10-11, UNE 217002, NBR 16149 / NBR 16150
Battery Certification	UN38.3, IEC 62619
Installation Style	Floor-Mounted
Warranty	10 years

*Supports up to 4 AE-F2.0 Smart Extra Batteries up to 10kWh.



Model	AE-F2.0
--------------	----------------

Battery Technical Specification	
--	--

Battery Chemistry	LiFePO ₄
Battery Nominal Voltage	51.2V
Battery Nominal Energy	2000Wh
Max. Charging / Discharging Current	40A
Battery Operating Voltage	44.8V ~ 57.6V
Battery Cycle Life	≥6000 (@25°C±2°C, 0.5C / 0.5C, 70%EOL)
Parallel Capability	5 pcs

Other Technical Specification	
--------------------------------------	--

Display	LED (SOC, Alarm)
Communication interfaces	CAN2.0, LoRa
Dimension (W × D × H)	450 × 210 × 244mm
Weight Approximate (kg)	20
Operating Temperature Range	-10°C ~ 50°C
Max. Operating Altitude	3000m
Relative Humidity	15% ~ 85% (No Condensing)
Certification	UN38.3, IEC 62619, CE
Installation Style	Floor-Mounted
Warranty	10 years

*Maximum 5 Pieces AE-F2.0 Packs in Parallel, Up to 10kWh.



SCENARIO-BASED ENERGY MANAGEMENT SOLUTIONS

Utilize energy in every outdoor adventure or household needs. Embrace effortless energy experience that's both eco-friendly and budget-friendly with our intelligent assistant.

Scenario 1 :



Compact Balcony Solar Plant
 Automated Energy-Saving Strategies

Scenario 2 :



Camping Power Solution
 Empower Your Outdoor Adventure

Scenario 3 :



Reliable Home Emergency Power Source
 Ensure You Stay Powered Up When You Need It Most

SMARTEN-UP YOUR HOME ENERGY

Real-time monitoring, with data information at a glance. Create scenario-based tasks that adapt to your daily routines. A smarter way to manage your electricity bills.

CONNECT, MONITOR, CONTROL

Seamlessly integrated with Deye devices for a smarter, more efficient energy experience.

User-friendly interface demystifies complex settings. Clear menu hierarchy, key information at your finger tips.

